


> Outdoor Advertising Display(Large Pitch) >> Sports Perimeter Display

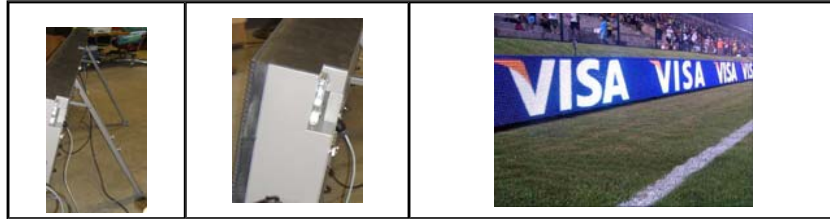

Sport Perimeter LED display

1. Plastic mask design in the front protect the players from injury effectively, protection LED display from the impact? from football and players.
2. Pulldown design,? brackets in rear back, could be foldaway when transportation.
3. Operating easily both in the software and the installation. Specially software design for perimeter led display ensure the stable and relatable displaying function.
4. High refresh rate ensure the reliable image.
5. Color calibration ensure a perfect image effect.
6. The weight is around 60kgs to 85kgs, which is very flexible for move.

Item	P20mm
Lamp Chip	Cree (LED Typ)
Real Pixel Pitch	20mm (Pixelabstand)
Virtual Pitch	10mm
LED Composition	2R1G1B (LED: 2x rot, 1x grün, 1x blau)
Pixel Density	2500dots/°O (Pixelanzahl) pro Modul
Module Resolution	48*64
Module Dimension	960mm x 1280mm
Power Consumption(Max)/Module	0.8KW
Brightness	>5500cd/°O
Processing (Color)	14bits
Gray Scale (linear)	10bits
Brightness Control	Auto/Manual Regulation
Viewing Distance	10-100m (Leseabstand)
Refresh Rate(minimum)	480Hz
Video Frame Rate (PAL/NTSC)	50/60Hz
Source Compatibility	TV,VGA,AV,S-Video, Composite, YcrCb, Yprpb, DVI,SDI
Temperature (Operating)	-20~40jæ
Temperature(Storage)	-20~60jæ
Humidity(Operating.)	10~99%
Humidity(Storage)	10~99%
Input power frequency	50/60Hz
Lifetime (50%brightness)	50,000hours
Smoothness	jA1mm
Ingress Protection	IP65 (Schutzklasse)

www.led-laufschriften.de

Siegfried Behrend
 Erfurterstraße 17-35039 Marburg
 Tel.05681 6185 Mobil 0171 7724187
 Fax 05681 609189
 E-Mail:behrend-automaten@t-online.de